MONITOR TOWERS

Model AG-TPF

Fixed monitor tower



PRODUCT DESCRIPTION

The monitor tower model AG-TPF from AG Fire Sprinkler is a fire-fighting equipment and supporting the use of artillery fire. Its structure strictly relevant standard design, security and stability, and it has security measures and spray cooling measures.

The operator will place in the fixed platform, where he will direct the monitor, in order to extinguish the fire.


TECHNICAL DATA

Model	AG-TPF
Working pressure	175 psi (12 bar)
Design pressure	232 psi (16 bar)
Maximum wind speed	130 km/h
Indicative weight for 10 m tower	1800 kg
Material	Carbon steel
Finish	Red RAL 3000 painted
Optional	Different size tower Other finished available under request Cooling system

COMPONENTS

ITEM	DESCRIPTION
1	Fixed platform
2	Safety protection
3	Access ladder
4	Cooling system
5	Load-bearing pipe
6	Cooling system cut-off valve
7	Supply

C/Alfoz de Bricia nº4 | P.I. Villalonquéjar | 09001 Burgos (Spain) | Tlfno: +34 947 28 11 08

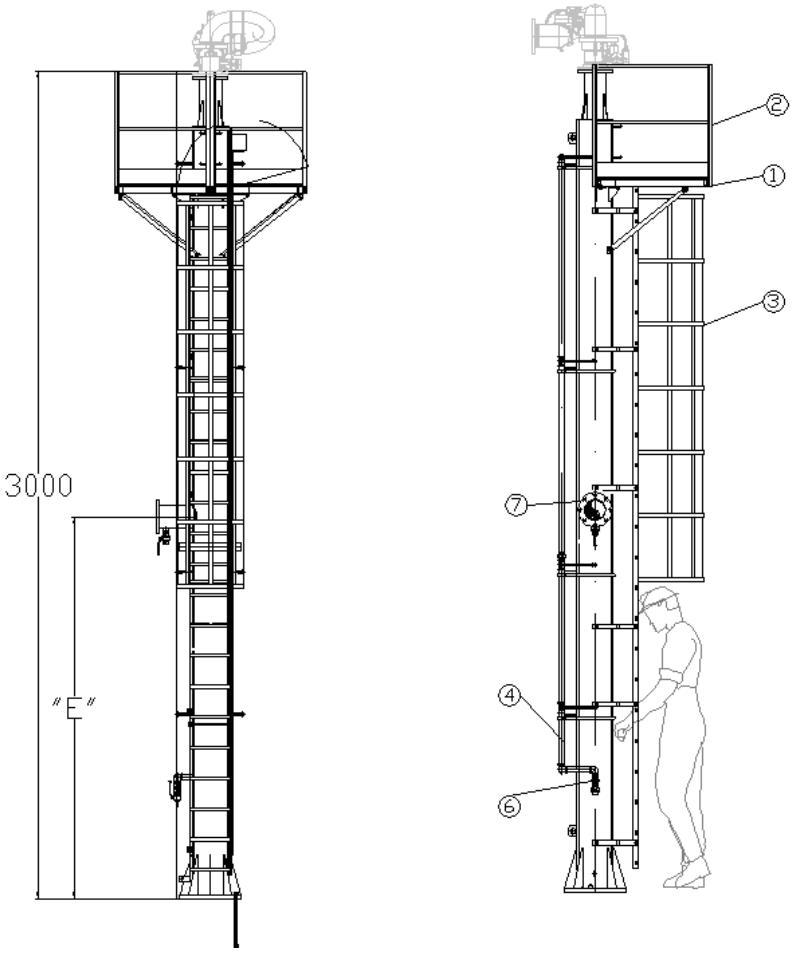

Dimensions in mm

ORDERING INFORMATION

PLATFORM	CODE
FIXED	AG-TPF

Specify:

Model	
Quantity	
Flanges diameter	
Cooling system	
Tower high	
Type of supply valve	
Finish	

The equipment presented in this data sheet is to be installed in accordance with the latest published Standards of the national fire protection association (NFPA), FM Global, LPCB, VdS or other similar organizations, also with the provisions of governmental codes or ordinances whenever applicable.
This documentation is not contractual. AG Fire Sprinkler reserves the right to any kind of change without notice.

C/Alfoz de Bricia nº4 | P.I. Villalonquéjar | 09001 Burgos (Spain) | Tlfno: +34 947 28 11 08