GROOVED BUTTERFLY VALVE GEAR OPERATED WITH TAMPER SWITCH

Model VM-300-G

Grooved 300 psi

Sizes: 2”, 2 ½”, 3”, 4”, 5”, 6”, 8”, 10” & 12”

LISTED
EX15826



PRODUCT DESCRIPTION

AG butterfly valves have been designed with a slow close gear operator, which effectively minimizes water hammer. These valves feature minimum flow restriction and pressure loss when in the fully open position.

The AG grooved butterfly valve should be connected to the piping system with approved couplings or flange adapters. Flow may be from either direction, and the valve may be positioned in any direction.


TECHNICAL DATA

Model	VM-300-G Butterfly valve FM/UL Grooved 300 psi Gear operated with tamper switch
Sizes	2” DN50 (1) 2 ½” DN65 3” DN80 4” DN100 6” DN150 8” DN200 10” DN250 (1) 12” DN300 (1)
End connection	Grooved ANSI / AWWA C606
Operated	Gear Position indicator Tamper Switch
Maximum working pressure	21,4 bar (300 psi)
Maximum test pressure	42,8 bar (600 psi)
Maximum working temperature	250º F (120ºC)
Uses	Outdoors and indoors
Coating	Fusion bonded epoxy coating in accordance with ANSI/AWWA C550
Finish	Fire red RAL 3000

(1) 2”, 10” & 12” butterfly valves only UL listed, not FM.

C/Alfoz de Bricia nº4 | P.I. Villalonquéjar | 09001 Burgos (Spain) | Tlfno: +34 947 28 11 08

DIMENSIONS

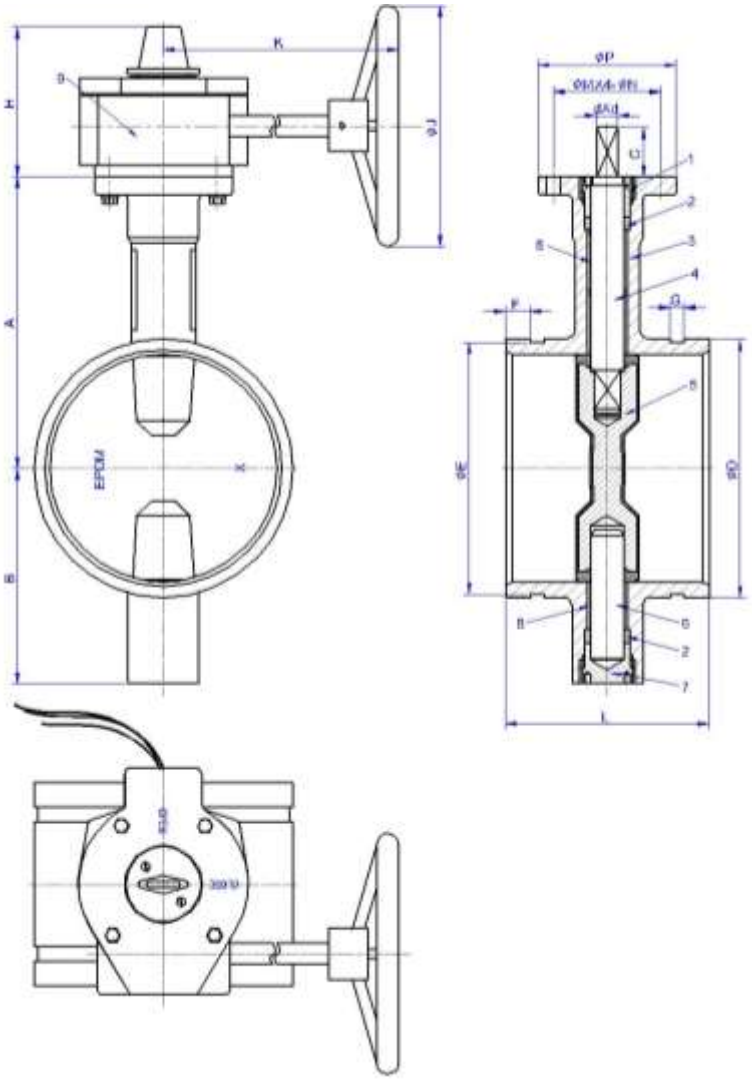

SIZES		DIMENSIONS (mm)														
Inch	mm	A	B	C	D	E	F	G	H	K	J	P	M	N	d	L
2	50	110	85	32	60,3	57,15	15,9	7,9	111	153	152	90	70	9	10	81
2 ½	65	125	95	32	73	69,1	15,9	7,9	111	153	152	90	70	9	10	96,4
					76,1	72,3										
3	75	140	100	32	88,9	84,9	15,9	7,9	111	153	152	90	70	9	11	97
4	100	160	100	32	114,3	110,1	15,9	9,5	111	153	152	90	70	9	14	115,1
5	125	170	125	32	139,7	135,5	15,9	9,5	111	218	152	90	70	9	14	132,4
					141,3	137										
6	150	190	140	32	165,1	160,9	15,9	9,5	111	153	200	90	70	9	16	132,4
					168,3	164										
8	200	230	175	32	216,3	211,6	19	11,1	126	210	300	125	102	12	19	147,4
					219,1	214,4										
10	250	260	200	45	267,4	262,6	19	12,7	126	210	300	125	102	12	24	159
					273	268,3										
12	300	300	240	45	318,5	312,9	19	12,7	161	249	350	150	125	14	26	165
					323,8	318,3										

C/Alfoz de Bricia nº4 | P.I. Villalonquéjar | 09001 Burgos (Spain) | Tlfno: +34 947 28 11 08

MATERIALS

ITEM	NAME	MATERIAL	ESPECIFICATION
1	Upper Shaft Sealing Nut	WCB	ASTM A216
2	Shaft Seal	EDPM	ASTM D2000
3	Body	DI	ASTM A536
4	Upper Shaft	SS416	ASTM A582
5	Disc	DI+EDPM	
6	Lower Shaft	SS416	ASTM A582
7	Lower Shaft Sealing Nut	WCB	ASTM A216
8	Stem Bushing	PTFE	ASTM D4894
9	Gear Box	-	-

INSTALLATION

When the valves are received from the manufacturer they should be handled carefully to avoid breakage and damage to the seating area. Before installation of the valve, clean piping, flange and coupling. When the valve closes hard, it is usually due to debris lodged in the sealing area. Often this may be corrected by backing off the hand wheel and closing again.

The valve should never be forced to seat by applying a wrench to the hand wheel as this may distort the valve components or score the sealing surface. The use of excessive force to open or close the valve violates all warranties whether express or implied.

The inlet and outlet pipe adjacent to the valve should be properly supported to prevent excessive stress on the valve body. The valves should not be used to force a pipeline into position as this may result in distortion of the valve body.


Conduit and electrical connections to the optional tamper switch must be in accordance with National Electrical Code (NFPA 72) and requirements of the local authority having jurisdiction.

SWITCH INSTALATION

AG butterfly valves are provided with internal supervisory position switches. The tamper switch operates by a cam connected to the valves stem. The switch will change position within two (2) full turns of the hand wheel fro, the fully open position.

Switch #1:
For connection to the supervisory circuit.
Normally closed: 2 red.
Normally open: 2 yellow.
Common: 2 white.

Switch #2:
Auxiliary switch connected per authority.
Normally closed: 1 orange.
Normally open: 1 blue.
Common: 1 black.
Ground Lead: 1 green.

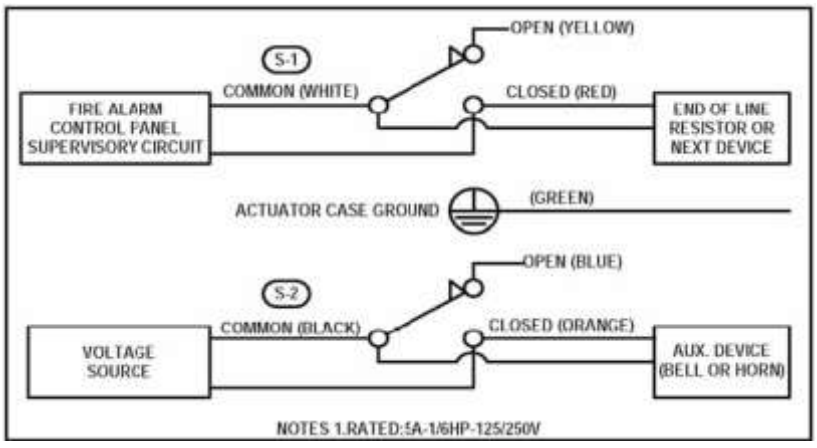

C/Alfoz de Bricia nº4 | P.I. Villalonquéjar | 09001 Burgos (Spain) | Tlfno: +34 947 28 11 08

ORDERING INFORMATION

Specify:

Model	
Quantity	
Size of valve	

AG FIRE SPRINKLER

AG Fire Sprinkler offers a wide selection of components. Then a list of products is presented by AG Fire Sprinkler, we can offer all these components, made with precision to protect people, anywhere, anytime.

- Sprinklers
  - Standard Coverage
  - Extended Coverage
  - Storage
  - Dry
  - Accessories
- System Valves
  - Wet
  - Dry
  - Preaction Equipment
  - Accessories
- Spray System Open Nozzles
  - High Velocity Nozzles
  - Medium Velocity Nozzles
  - Window Nozzles
  - Hydroshield Nozzles
  - Mushroom Type Nozzles
- Foam equipment
  - Tanks
  - Proportioners
  - Foam Discharge Equipment
  - Foam Concentrates
- Deluge equipment for Water Spray and Foam
  - Clapper Deluge Valves
  - Diaphragm Deluge Valves
- Monitors
  - Manual Monitors
  - Remote Monitors
  - Monitor Nozzles
  - Towers and Trolleys
- Valves
  - Butterfly Valves
  - Gate Valves
  - Check Valves
  - Pressure Control Valves
  - Test and Drain
  - Hose, Hydrant and Fire Connection Valves
  - Fire Department Connections

The equipment presented in this data sheet is to be installed in accordance with the latest published Standards of the national fire protection association (NFPA), FM Global, LPCB, VdS or other similar organizations, also with the provisions of governmental codes or ordinances whenever applicable.
This documentation is not contractual. AG Fire Sprinkler reserves the right to any kind of change without notice.

C/Alfoz de Bricia nº4 | P.I. Villalonquéjar | 09001 Burgos (Spain) | Tlfno: +34 947 28 11 08